

INDEX

	Page
Revision Sheet	2
6F 12F 24F 48F 96F 144F ADSS Cable, 120m Span (1.0% SAG, NESC Light)	3-4

	Name	Signature	Date
Issued by	Zhang Zixin	<i>Zhang Zixin</i>	24 th Jul. 2020
Approved by	Wang Wusheng	<i>Wang Wusheng</i>	24 th Jul. 2020

CUSTOMER APPROVAL			
	Name	Signature	Date
Approved by			


NOTE: Please return this TD signed for acceptance together with the purchase order. An unsigned TD will be considered fully accepted upon receipt of the purchase order.

REVISION SHEET

Issue No.	Date	
01	28 th May. 2020	First issue
02	24 th Jul. 2020	add 6F cable

6F 12F 24F 48F 96F 144F ADSS Cable, 120m Span (1.0% SAG, NESC Light)
Cable Design

IEC/EN 60794-3-20

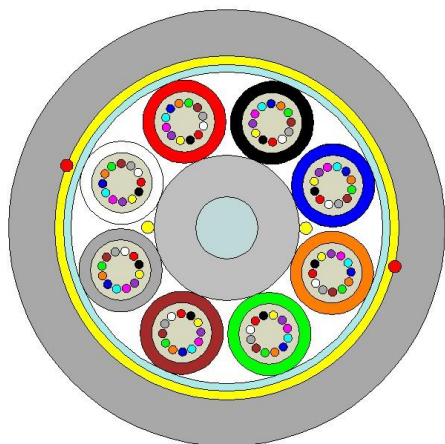

- not to scale -

- **Central strength member (CSM):** glass fibre reinforced plastic material (FRP) with PE coating when needed.
- **Tube:** thermoplastic material, containing up to 12 optical fibres and filled with a suitable water tightness compound.
- **Stranding:** the required number of elements (tubes or fillers) are SZ stranded around the central strength member.
- **Core Wrapping:** water blocking tape (dry core).
- **Peripheral reinforcement:** aramid yarns.
- **Outer Sheath:** HDPE. 2 ripcords beneath.

Technical data

No. of Fibres		6, 12, 24	48	96	144
Design(element × fibre per tube)		6x6	6x12	8x12	12x12
Loose Tube / Filler - Ø nominal	mm	2.1	2.2	2.2	2.2
CSM/coating nominal diameter	mm	2.3	2.5	2.7/3.9	2.7/6.9
Outer sheath nominal thickness	mm	1.5	1.5	1.5	1.5
Cable nominal Diameter	mm	10.0	10.4	11.7	14.7
Cable Weight	kg / km	77	80	101	156
Maximum installation tension	N	1100	1100	1600	2300
Max. Operating tension	N	2100	2300	2700	3600
Maximum span	m	120			
Minimum sag	%	1.0			
NESC CONDITIONS		NESC Light			
Min. bending radius	mm	Without Tension 10 x Cable-Ø		Under Maximum Tension 20 x Cable-Ø	
Temperature range	°C	Installation -10 -> +60;	Transport. & Storage -40 -> +70 ;	Operation -40 -> +70	

Please refer to our General Installation, Safety & Handling recommendations before handling.

Main characteristics

Test	Standard	Value	Sanction*
Max. installation tension	IEC 60794-1-2-E1	see above table	no visible fibre strain, Δα reversible
Max. Operating tension	IEC 60794-1-2-E1	see above table	fibre strain ≤ 0.2%, Δα reversible
Crush(short term)	IEC 60794-1-2-E3	2200 N / 100mm	Δα ≤ 0.1 dB
Temperature range	IEC 60794-1-2-F1	-40 -> +70°C	Δα ≤ 0.1 dB /km
Water Penetration	IEC 60794-1-22-F5C	sample=3m, water=1m	No water leakage after 24 hour

* values for single-mode fibres, all optical measurements performed at 1550 nm.

Optical Characteristics

See the attached cabled optical fibre data sheet.

Identification

Fibre Colours

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua

Buffer Tube Colours

Tube No.	1	2	3	4	5	6	7	8	9	10	11	12
Tube Colour	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua

Fillers are black

Sheath Colour:

The outer sheath colour is black.

Sheath Marking:

The outer sheath is marked in 1 meter intervals as follows:

PRYSMIAN XXXM WWW.FYCOTELECOM.COM FIBRA OPTICA ADSS XXH1LOS SPAN120M [#PO] YYYY

Logistic

Packing:

Wooden drums with protection.

Delivery Lengths:

Standard delivery length is 5 km with a tolerance of $\pm 3\%$.

© PrysmianGroup 2020, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by PrysmianGroup: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of PrysmianGroup. The information is believed to be correct at the time of issue. PrysmianGroup reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by PrysmianGroup.

Properties of cable with standard Enhanced SM fibre

ESMF, low water peak single mode fibre G652D, OS2

General and application

The optical fibres are made of a high grade doped silica core surrounded by a silica cladding.

They are coated with a dual layer, UV cured acrylate based coating.

This enhanced single mode fibre provides improved performance across the entire 1260 nm to 1625 nm wavelength spectrum due to its low attenuation in 1383 nm, the water-peak region.

Standards and Norms

IEC / EN 60793-2-50 Category B.1.3	EN 50 173-1:2007, cat. OS2 and OS1
ITU-T Recommendation G.652.D and C, B, A	ISO / IEC 11801:2002, cat. OS2 and OS1
IEEE 802.3 – 2002 incl. 802.3ae	ISO / IEC 24702:2006, cat. OS2 and OS1

Optical properties

Attribute	Measurement method	Units	Limits
Mode field diameter at 1310 nm	IEC/EN 60793-1-45	µm	9.2 ± 0.4
Mode field diameter at 1550 nm		µm	10.4 ± 0.5
Chromatic dispersion coefficient:	IEC/EN 60793-1-42		
In the interval 1285 nm – 1330 nm		ps/km • nm	≤ 3.5
At 1550 nm		ps/km • nm	≤ 18.0
At 1625 nm		ps/km • nm	≤ 22.0
Zero dispersion wavelength, λ_0		nm	1300 - 1324
Zero dispersion slope		ps/(nm ² • km)	≤ 0.092
Cut-off wavelength	IEC/EN 60793-1-44	λ_{cc} nm	≤ 1260 *
Polarisation mode dispersion (PMD) coefficient, cabled	IEC/EN 60793-1-48	ps/√km	≤ 0.2
PMD _Q Link Design Value (computed with Q=0.01%, N=20)	IEC/EN 60794-3	ps/√km	≤ 0.06

* guaranteed value according to the ITU-T (ASTM G650) method

Attenuation

Attribute	Measurement method	Units	Limits
Maximum attenuation value of cable at 1310 nm	IEC/EN 60793-1-40	db/km	≤ 0.36
Maximum attenuation value of cable at 1550 nm	IEC/EN 60793-1-40	db/km	≤ 0.22
Inhomogeneity of OTDR trace for any two 1000 meter fibre lengths		db/km	Max. 0.1

Attenuation variation vs Bending

Attribute	Measurement method	Units	Limits
100 turns on a R=25 mm mandrel at 1310 & 1550 nm	IEC/EN 60793-1-47	db	≤ 0.05
100 turns on a R=30 mm mandrel at 1625 nm	IEC/EN 60793-1-47	db	≤ 0.05

Group index of refraction

Attribute	Measurement method	Units	Limits
1310 nm	IEC/EN 60793-1-22	-	1.467
1550 nm	IEC/EN 60793-1-22	-	1.468
1625 nm	IEC/EN 60793-1-22	-	1.468

Geometrical properties

Attribute	Measurement method	Units	Limits
Cladding diameter	IEC/EN 60793-1-20	μm	125.0 ± 1.0
Cladding non-circularity	IEC/EN 60793-1-20	%	≤ 1
Core (MDF) – cladding concentricity error	IEC/EN 60793-1-20	μm	≤ 0.6
Primary coating diameter - ColorLock ^{XS} and natural	IEC/EN 60793-1-21	μm	245 ± 10
Primary coating non-circularity	IEC/EN 60793-1-21	%	≤ 6
Primary coating-cladding concentricity error	IEC/EN 60793-1-21	μm	≤ 12

Mechanical properties

Attribute	Measurement method	Units	Limits
Proof stress level	IEC/EN 60793-1-30	Gpa	≥ 0.7 (≈ 1%)
Strip force (peak)	IEC/EN 60793-1-32	N	1.3 ≤ F _{peak.strip} ≤ 8.9
Dynamic fatigue resistance aged and unaged (N _d)	IEC/EN 60793-1-33		≥ 20
Static fatigue, aged n _s	IEC/EN 60793-1-33		≥ 23

All measurements in accordance with ITU-T G650 recommendations

© PrysmianGroup 2020, All Rights Reserved

All sizes and values without tolerance are reference values. Specification are for product as supplied by PrysmianGroup: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of PrysmianGroup. The information is believed to be correct at the time of issue. PrysmianGroup reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by PrysmianGroup.